

MAX-3

V1906.01



EP
Let's grow together

MAX-3

Excellent Performances & Reliability

CPCD40T3

T3 Diesel Forklift 4.0t

EP EQUIPMENT CO.,LTD
www.ep-ep.com

CPCD40T3

T3 Diesel Forklift 4.0t


General		1 Manufacture				EP		CPCD40T3		CPCD40T3		CPCD40T3	
Dimensions	2	Model											
	3	Power type											
	4	Rated capacity			kg								
	5	Load center			mm								
	6	Lift height			mm								
	7	Free lift height			mm								
	8	Fork size	L×U×N		mm								
	9	Mast tilt angle	K/T		deg								
	10	Front overhang			mm								
	11	Rear overhang			mm								
	12	Overall dimensions	Length to face of fork		mm								
	13		Overall width		mm								
	14		Mast lowered height		mm								
	15		Mast extended height		mm								
	16	Turning radius	Overhead guard height		mm								
	17				mm								
Performance	18	no load/full load	Travel speed	II/ I	km/h								
	19		Lift speed		mm/sec								
	20		Lowering (Full load)										
	21	Max. gradeability			%								
	22	Tires	Front										
Wheel & Tires	23		Rear										
	24	Tread	Q (Front)		mm								
	25		S (Rear)		mm								
	26	Wheelbase			mm								
	27	Ground clearance	mast frame		mm								
Weight	28	no load/full load			mm								
	30	Self weight			kg								
	31	Weight Distribution	Full load		kg								
	32		Rear		kg								
	33		Front		kg								
Power & transmission	34		No load		kg								
	35	Battery			V/AH								
	36	Engine	Model										
	37		Manufacture										
	38		Rated output		kw/rpm								
	39		Rated torque		N m/rpm								
	40	Displacement	No. of cylinder										
	41		Bore×stroke		mm								
	42		Displacement		cc								
	43	Transmissions	Type										
	44		Shift										

1. Special lifting height available for further information please contact us.

2. Attachment available.

3. The specification in the table are for standard models only. For further information please contact us.


4. Specification are subject to change without notice.

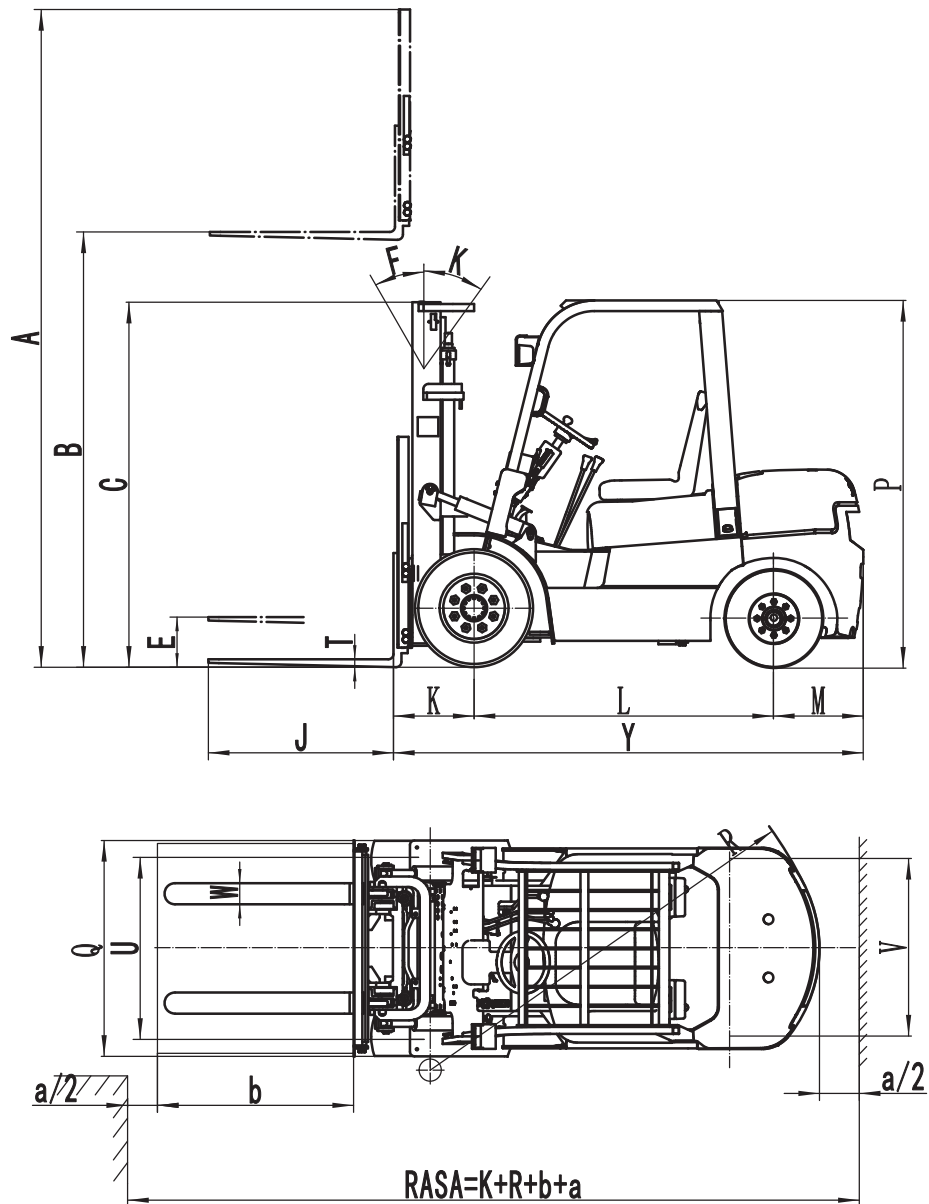

Mast Option

Type	Model	Max.fork height	Overall height			Free lift		Front Overhang	Tilt range		Capacity
			Lowered	Extended		Without backrest	With backrest		FWD	BWD	Load capacity at 500 mm
				Without backrest	With backrest						Single tire
Wide view mast	2W300	3000	2256	2966	3356	130	130	497	6	10	4000
	2W330	3300	2406	3116	3506	130	130	497	6	10	4000
	2W350	3500	2506	3216	3606	130	130	497	6	10	3850
	2W360	3600	2556	3266	3656	130	130	497	6	10	3800
	2W370	3700	2606	3316	3706	130	130	497	6	10	3700
	2W400	4000	2806	3516	3906	130	130	497	6	10	3600
	2W450	4500	3056	3766	4156	130	130	497	6	6	3500

CAPACITY CHART

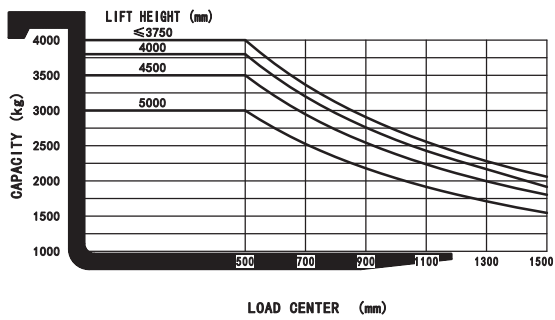

Option

Options		CPC(D)40T3
1	Fork length	○
2	Fork extension	○
3	Folded fork	○
4	Imported diesel engine	○
5	High exhaust	○
6	Dual air clearers or special air cleaner	○
7	Solid rubber tire	○
8	No marking solid tire	○
9	Overhead guard	○
10	Mast options	○
11	Attachments	○
12	Integrated side shift	○
13	Heater	○
14	Front windshield with wiper	○
15	Rear windshield with wiper	○
16	Fan	○
17	Simple cabin room	○
18	LED front light	○
19	LED Back light	○
20	Fire extinguisher	○
21	Suspension seat	○
22	Seat switch	○
23	Warning light	○
24	Insulation mat	○
25	Double front tyre	○
26	OPS system	○

Note: ● standard ○ option — NA